

B

REV	ZONE	DESCRIPTION	DATE	DAWN


1360

75

5 Core, 6mm² 2M

3*1P 32A
(CHiNT)Breaker

IPDU meter

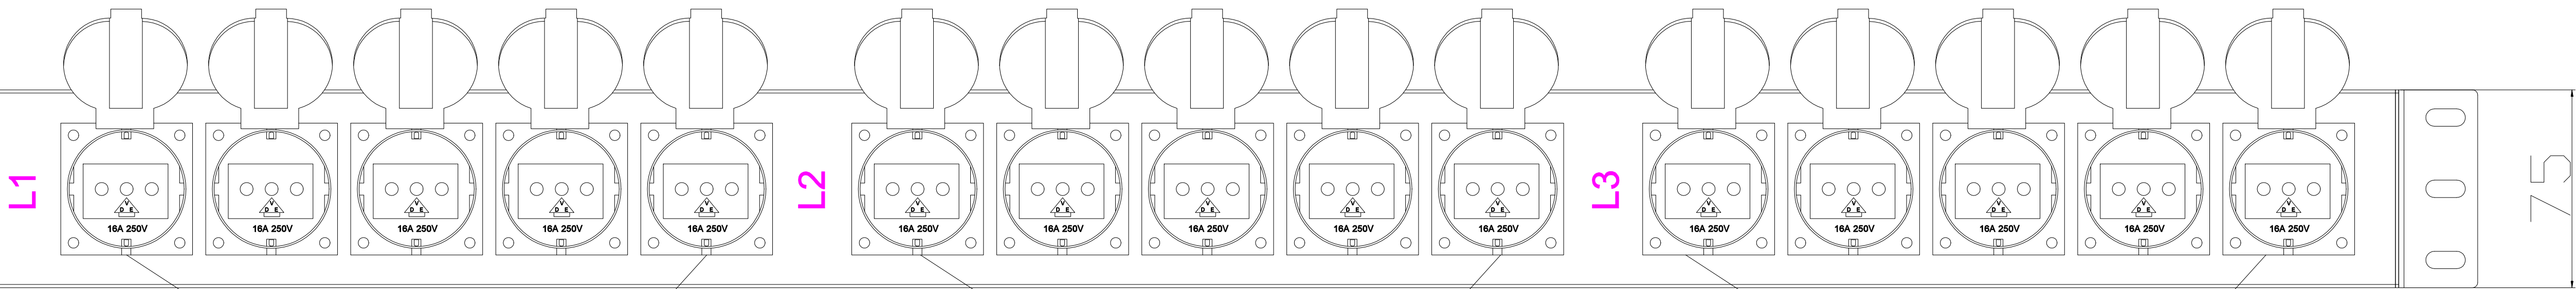


5way German Socket
With protection cover

5way German Socket
With protection cover

5way German Socket
With protection cover


- 1, Shell Material:1.2SGCC Color: Black powder
- 2,Input Voltage: 380-433Vac,WYE, 3N~,50/60 Hz,1Class I
- 3,Output Voltage: 220-250Vac (Y形接法)
- 4,Max current: 30A
- 5,Input wire specification: 5 Core, 6mm² 2M
- 6,Input Plug: NI
- 7,Output socket: 15*German Socket Rated: 250V 16A
- 8,Internal wire: Main wire 6mm², Branch line 1.5mm²
- 10,Intelligent control: IPDU Meter,

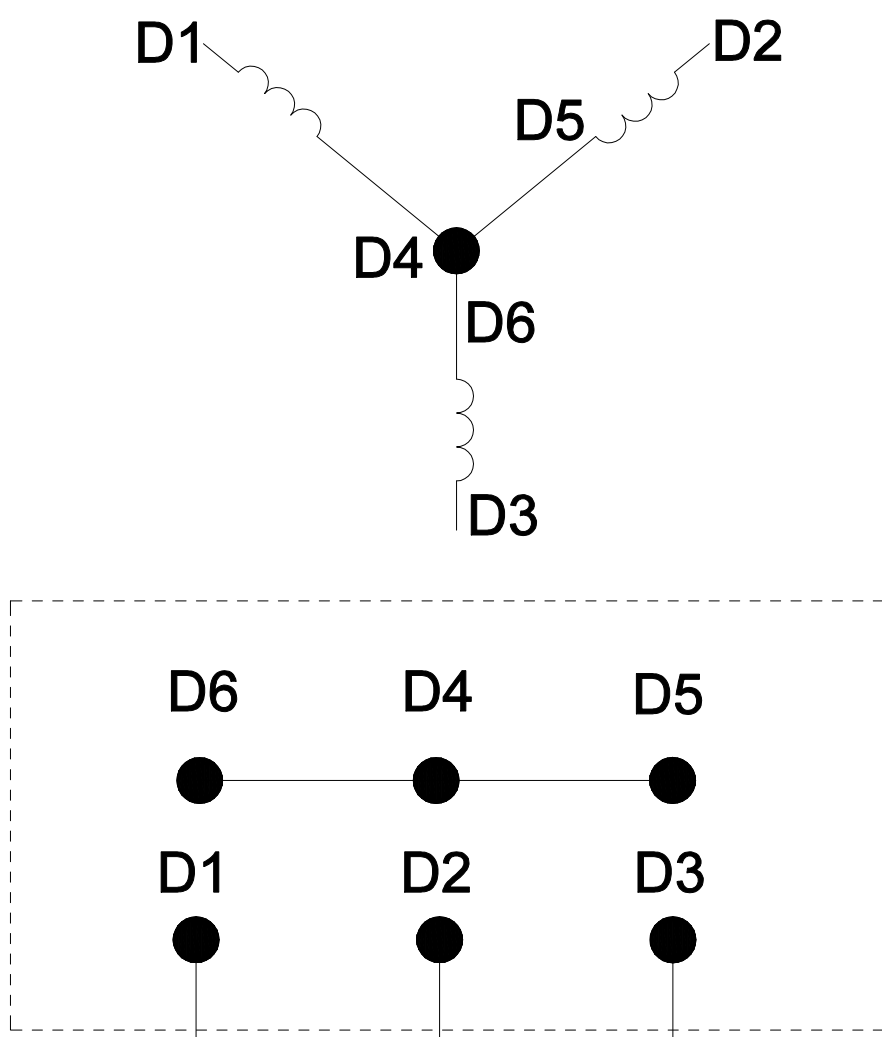


WYE

注：德标模块芯子外购，带保护盖子

Upper incoming line, vertical installation
Pictured third angle, scale: 1:1, Unit: mm

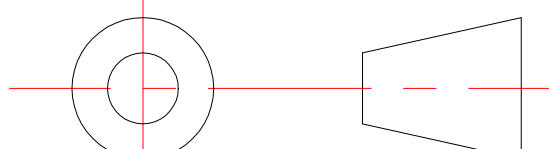UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MM, GENERAL TOLERANCE:			THIS DRAWING SHOWS ALL PRODUCT DIMENSIONS DO NOT SCALE DRAWING		东莞市欧伦特电子五金有限公司 DongGuan Orient Electronics & Metal Co.,Ltd						
0~50	±0.05	ANGULAR ±0.5°	FINISH:	TITLE: 15位德标-三相-IPDU-带线							
50~200	±0.10			QUANTITY/UNIT: MM	SIZE A4	MODEL NO.	DWG NO.	REV 4			
200~	±0.20										
DRAWN Jonly		DATE 2022-08-10									
CHECKED		DATE									
APPROVED		DATE		SCALE 1							
				SHEET 1 OF 1							
MATERIAL:											

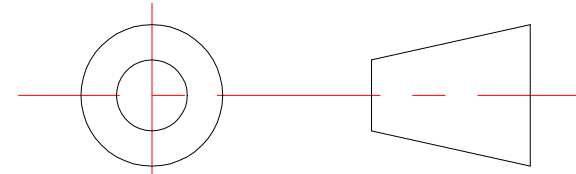

B