



B

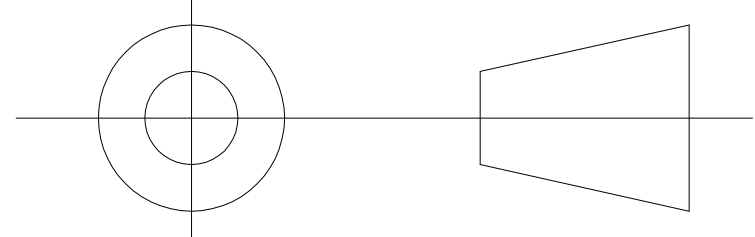


REV	ZONE	DESCRIPTION	DATE	DAWN

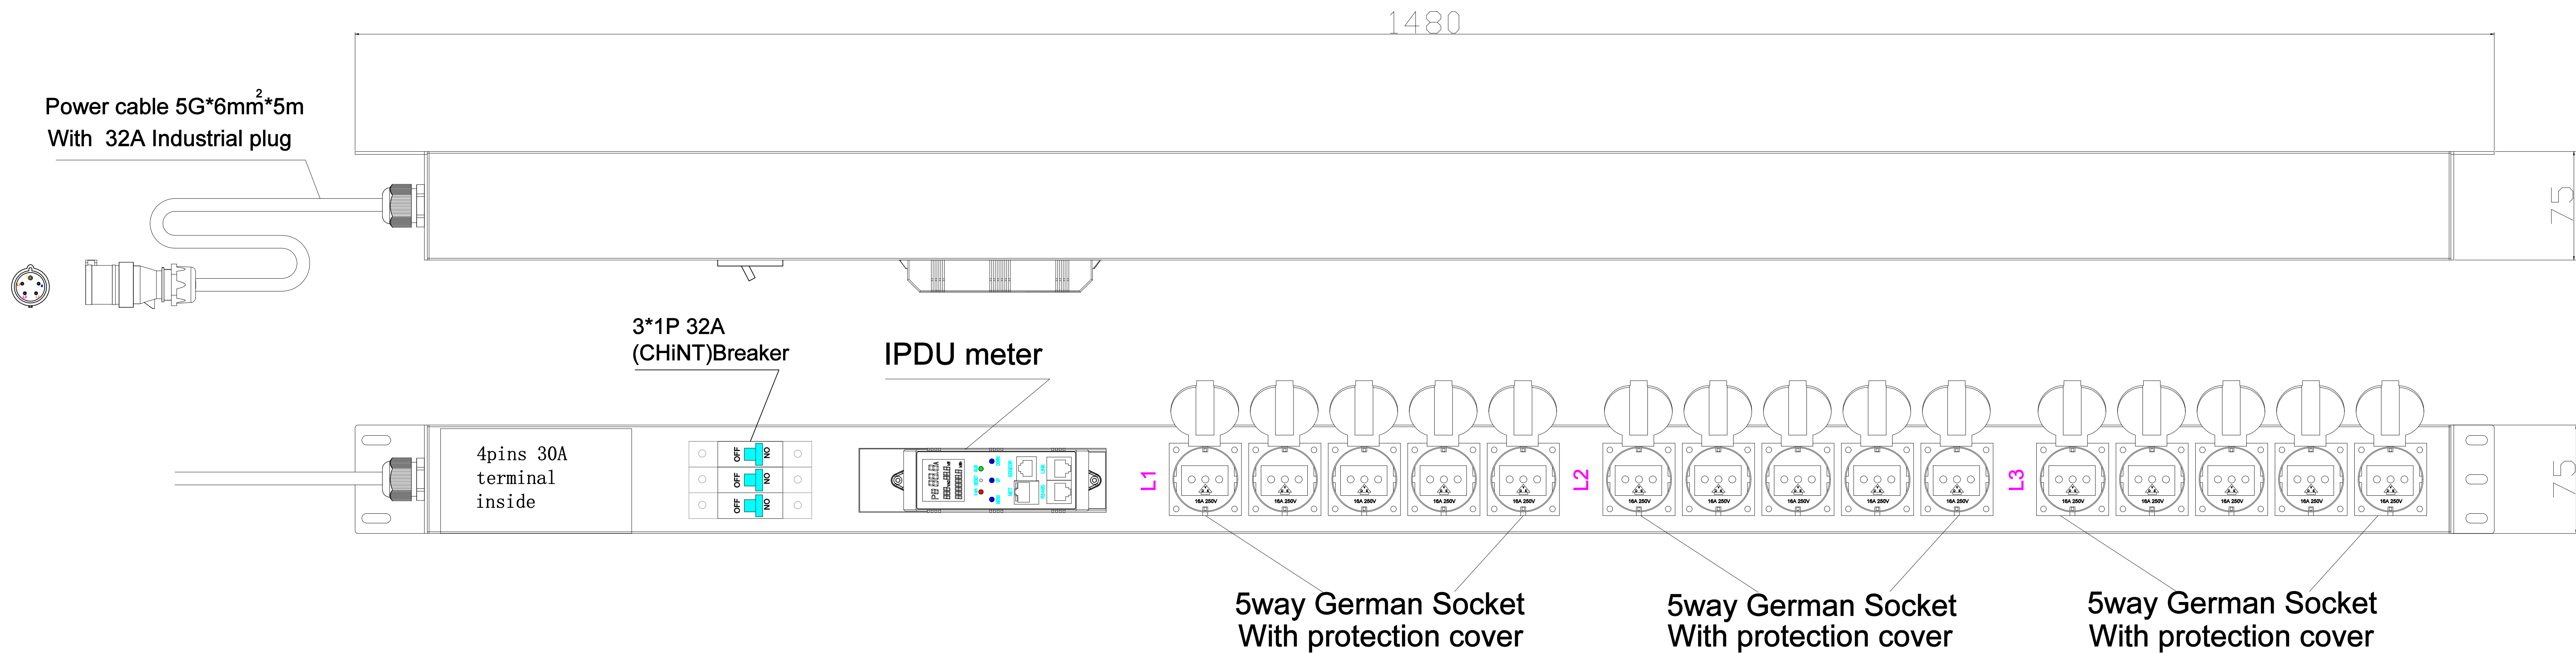


- 1, Shell Material:1.2SGCC Color: Black powder
- 2,Input Voltage: 380-433Vac,WYE, 3N~,50/60 Hz,1Class I
- 3,Output Voltage: 220-250Vac (Y形接法)
- 4,Max current: 30A
- 5,Input wire specification: 5 Core^ 6mm² 5M industrial connector male
- 6,Input Plug: NI
- 7,Output socket: 15\*German Socket Rated: 250V 16A
- 8,Internal wire: Main wire 6mm², Branch line 1.5mm²
- 10,Intelligent control: IPDU Meter,

Upper incoming line, vertical installation  
Pictured third angle, scale: 1:1, Unit: mm

注：德标模块芯子外购，带保护盖子

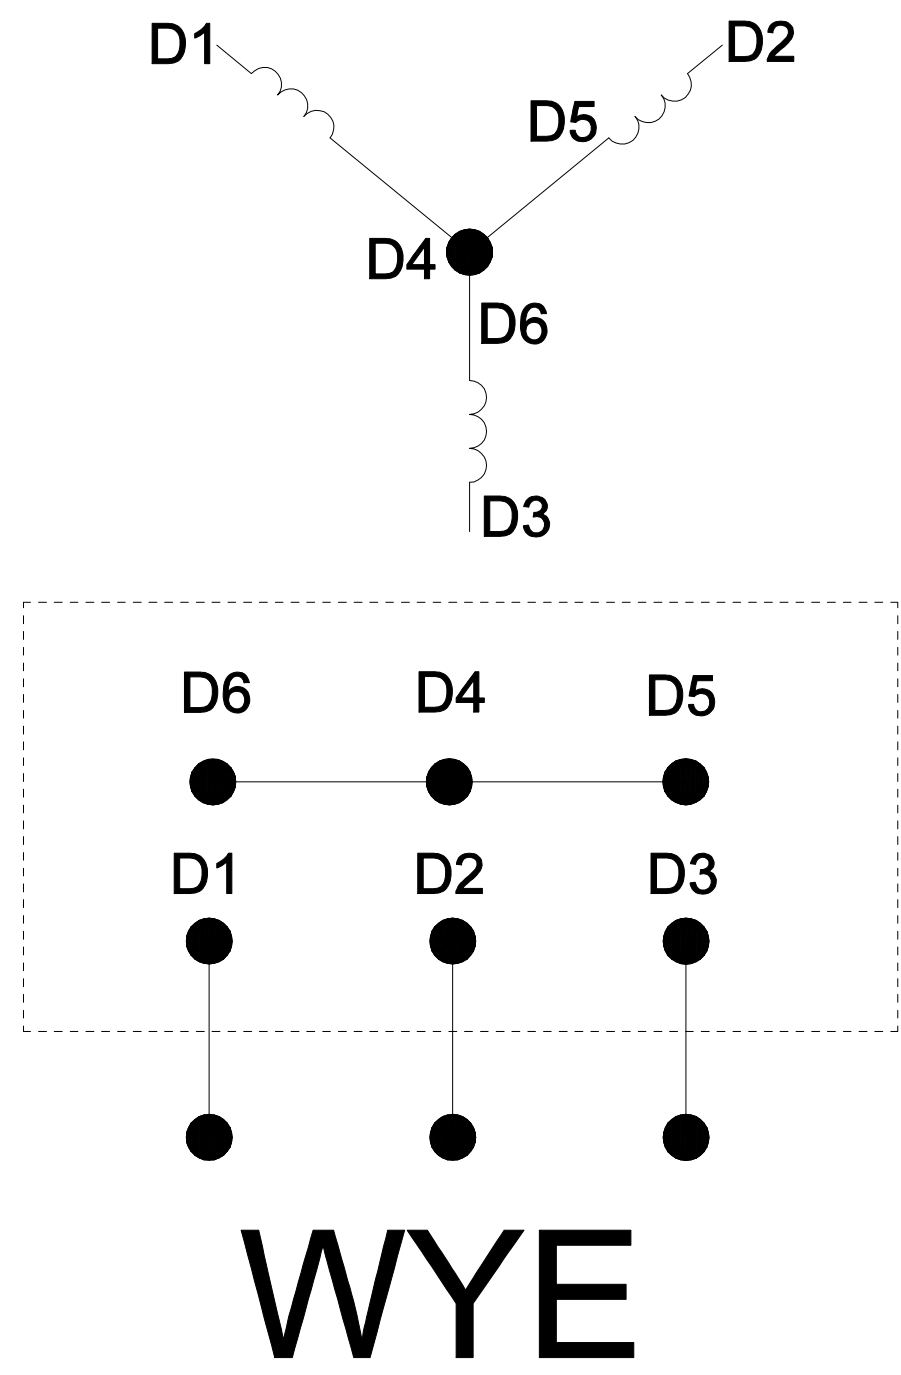

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MM, GENERAL TOLERANCE:			THIS DRAWING SHOWS ALL PRODUCT DIMENSIONS DO NOT SCALE DRAWING		东莞市欧伦特电子五金有限公司 DongGuan Orient Electronics & Metal Co.,Ltd									
0~50	±0.05	ANGULAR ±0.5°	FINISH:	TITLE: 15位德标-三相-IPDU-带接线盒										
50~200	±0.10			QUANTITY/UNIT: MM	SIZE A4	MODEL NO.	DWG NO.	REV 4						
200~	±0.20													
DRAWN Jonly		DATE 2022-08-10		MATERIAL:					SCALE 1		SHEET 1 OF 1			
CHECKED		DATE		APPROVED		DATE			SCALE 1		SHEET 1 OF 1			

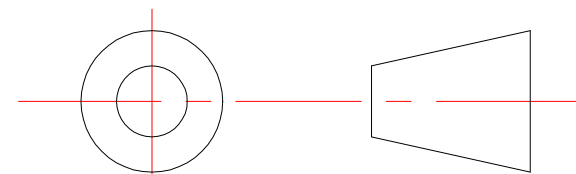

B